

# ZXM6-NH120 Series

ZNSHINE Solar 9BB HALF-CELL  
Mono PERC PV Module



120


Mono Poly Solutions



350W | 355W | 360W | 365W | 370W


Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-NH120 monocrystalline modules by ZNSHINE SOLAR( power output 350 up to 370Wp, represent a highly flexible solution for diverse installation types, from industrial rooftop plants to small home PV systems or large ground surfaces. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-NH120 Monocrystalline solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product. The linear warranty on product outputs further ensures increased security and return on investments over time.

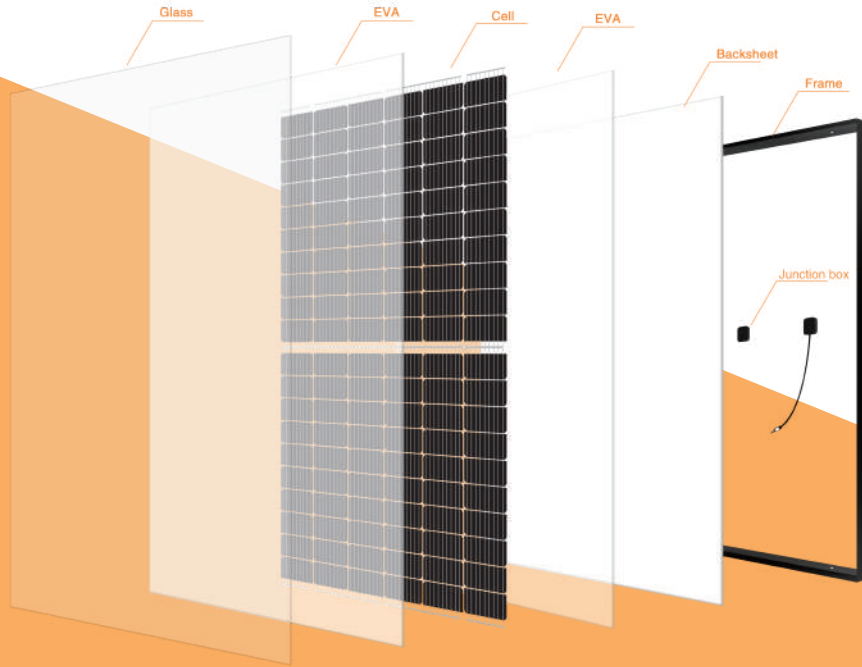

12 years product warranty for general application  
15 years product warranty for Rooftop PV system  
25 years linear power warranty

0.55% Annual Degradation over 25 years

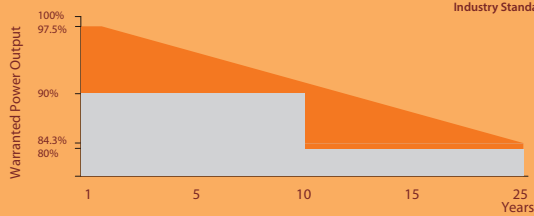

Znshine's Standard  
Industry Standard



Low-light Response



High Efficiency



Innovative PV module



Warranty



Standard Installation



Anti PID



ZNSHINE PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNSHINE as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

[www.znshinesolar.com](http://www.znshinesolar.com)

## ELECTRICAL PROPERTIES | STC\*

Module Type	ZXM6-NH120-350/M	ZXM6-NH120-355/M	ZXM6-NH120-360/M	ZXM6-NH120-365/M	ZXM6-NH120-370/M
Nominal Power Watt Pmax(W)	350	355	360	365	370
Power Output Tolerance Pmax(%)	350±3%	355±3%	360±3%	365±3%	370±3%
Maximum Power Voltage Vmp(V)	33.4	33.6	33.8	34.0	34.2
Maximum Power Current Imp(A)	10.48	10.57	10.66	10.74	10.82
Open Circuit Voltage Voc(V)	40.2±3%	40.4±3%	40.6±3%	40.8±3%	41.0±3%
Short Circuit Current Isc(A)	11.04±3%	11.14±3%	11.24±3%	11.33±3%	11.42±3%
Module Efficiency (%)	19.21	19.49	19.76	20.04	20.31

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL PROPERTIES | NMOT\*

Maximum Power Pmax(Wp)	256.1	259.8	263.5	267.1	270.6
Maximum Power Voltage Vmpp(V)	30.9	31.1	31.3	31.4	31.6
Maximum Power Current Impp(A)	8.28	8.36	8.43	8.50	8.57
Open Circuit Voltage Voc(V)	37.2	37.4	37.6	37.8	38.0
Short Circuit Current Isc(A)	8.92	9.00	9.08	9.15	9.22

\*NMOT(Nominal module operating temperature):Irradiance 800W/m<sup>2</sup>,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NMOT	44°C ±3°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

\*Do not connect Fuse in Combiner Box with two or more strings in parallel connection

## WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C ~ +85°C
Maximum series fuse	20 A
Maximum load(snow/wind)	3600/2400(with safety factor 1.5)
Hailstone test	25mm hailstone at the speed of 23mm/s


## MECHANICAL DATA

Solar cells	Mono PERC 166×83mm
Cells orientation	120 (6×20)
Module dimension	1755×1038×35 mm(with Frame, Silver/Black)
Weight	20.5 kg
Glass	High transparency,low iron,tempered
	Glass 3.2 mm (AR-coating)
Junction box	IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm <sup>2</sup>
Connectors	LJQ-3 Taizhou Jinxiu Electrical Science & Technology Co Ltd

## PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	30
Piece/Container	780

## DIMENSION OF THE PV MODULE (mm)

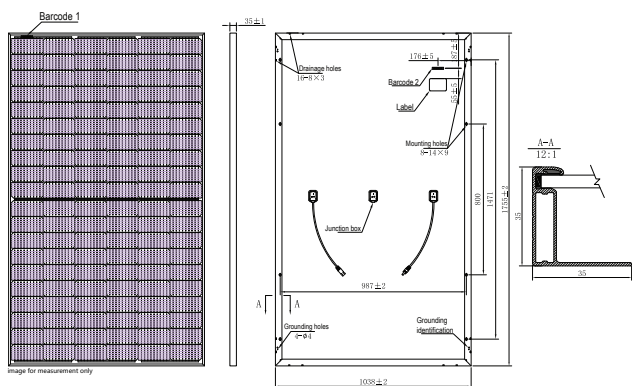

## I-V CURVES OF THE PV MODULE

